


EL 400 D4 01 | 119377



— LOT6 - 2018

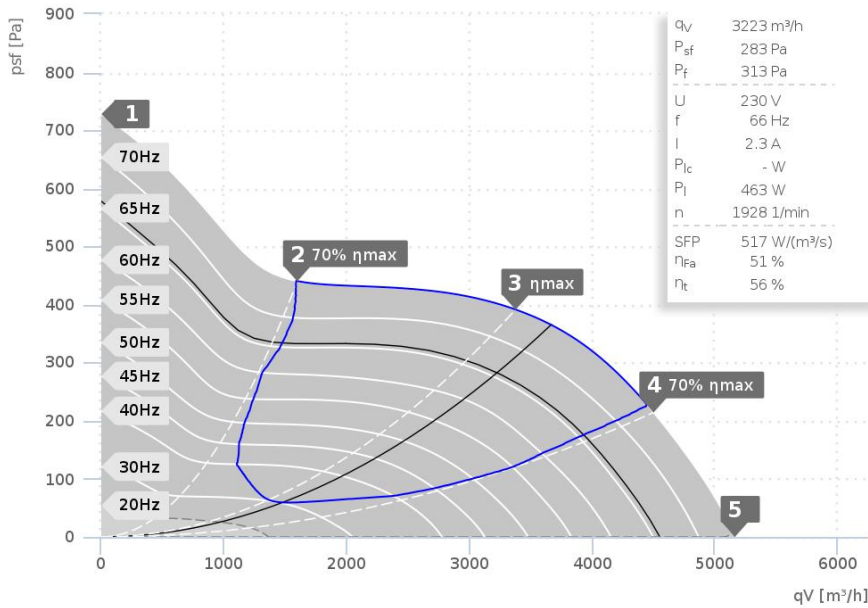

- **Attention! See note at FU-operation**
- Diagonal impeller with stator
- Galvanized metal housing
- Speed controllable
- Integrated thermostatic switch
- Including mounting bracket

| Operating Point | | 1 | 2 | 3 | 4 | 5 |
|--------------------------------|-------|------|------|------|------|------|
| Current I | A | 2,4 | 2,2 | 2,5 | 2,5 | 2,4 |
| Power consumption P_1 | W | 600 | 477 | 628 | 651 | 584 |
| RPM n | 1/min | 2191 | 2202 | 2186 | 2182 | 2193 |
| SPL inlet L_{WA5} | dB(A) | 87 | 83 | 79 | 81 | 83 |
| SPL outlet L_{WA6} | dB(A) | 91 | 88 | 84 | 86 | 88 |
| SPL casing break out L_{WA2} | dB(A) | 75 | 72 | 68 | 69 | 70 |

| Sound power (L_W) dB(A) | | Medium Frequency Band | | | | | | | | |
|-----------------------------|-----------|-----------------------|----|-----|-----|-----|----|----|----|----|
| | | Σ | 63 | 125 | 250 | 500 | 1k | 2k | 4k | 8k |
| Inlet | L_{WA5} | 74 | - | 49 | 63 | 66 | 68 | 70 | 65 | 58 |
| Outlet | L_{WA6} | 80 | - | 49 | 69 | 76 | 75 | 72 | 68 | 60 |
| Casing | L_{WA2} | 65 | - | 43 | 48 | 59 | 61 | 57 | 55 | 45 |

| EL 400 D4 01 119377 | |
|---------------------------|----------|
| Voltage U_N | 230 V 3~ |
| Current I_{max} | 2,7 A |
| Ambient Temperature t_A | 80 °C |
| Medium temperatures t_M | 80 °C |
| Speed Control | f |
| Motor Protection | TAO |
| Isolation Class | F |
| Weight | 14,8 kg |

